01	Cell	8869150PMH	21
02			2
03	Red Wire(Ba2+)	UL1015#14	1
04	Black Wire(Ba1+)	UL1015#14	1
05	Heatshrink tube		2
06	Protection Board	RPB-07S50A-B100	1
07	Heatsink		3
08	Charge DC plug	5.5X2.1mm	1
09	Communication connector	PHR-4P	1
10	Insulating Tape		1
11	PVC	Blue	1
12	Label	30X60mm,	1
13	Label	AE00-717 30*30mm	1
14	Charge FUSE	5A	1
15	Discharge FUSE	50A	1
16	Voltage Detect connect	XH2.5-8P	1

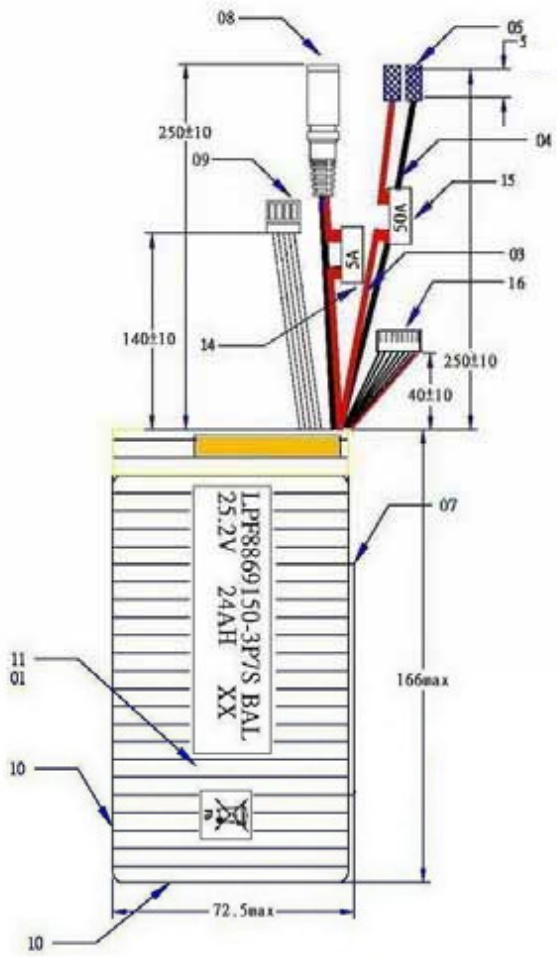

LPF8869150-3P7S BAL
25.2V 24AH XX

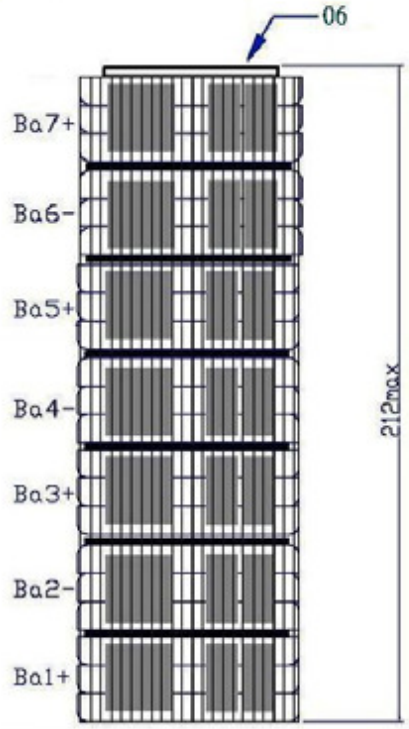

LPF8869150-3P7S BAL
25.2V 24AH XX

2.The battery hare charge protection and discharge protection and balancing function.

			Ciblenergie mm
A2	8869150		AE413-26-A
10/4/19			